

UP UNITEDPOWER[®]
PRODUCT CATALOGUE



UNITED POWER EQUIPMENT CO.,LTD
ADD: No.1 Gaoqi Industrial Zone, Nanyu, Fuzhou 350109, P.R. China
TEL: +86-591-38407543 FAX: +86-591-83765098
E-mail: info@unitedpower.cn
www.unitedpower.cn



Engines • Generators • Weldings • Water Pumps • High Pressure Washers



UNITEDPOWER Technology Group designs, develops, manufactures and sells an extensive range of engine-driven power equipment, including generators, outdoor power equipment and components such as engines. Our major products comprise residential as well as commercial generators which are currently delivered to more than 85 countries in the world. Relevant markets are the domestic market (China) and overseas markets, in particular the Europe and North America. The operating companies of United Power Technology Group are incorporated under the laws of the People's Republic of China and located in Fuzhou, China. The company was successfully listing in Frankfurt on 11th June 2011.

Our products have been successfully marketed to Europe, North America and other countries with certifications of CE, EMC, EU-V, NOISE, GS, EPA, CARB and CSA. We have established a reliable and steady relationship with the global top brands. Meanwhile we have been developing our own brand with a reputation for its high quality, competitive price and environmental protection.

United Power operates three production facilities in China with over 1.5 million square feet of manufacturing capacity. We possess a substantial in-house capability for designing, processing and assembling the key components of our products resulting in a high degree of vertical integration. The products are designed to ensure low emission, low maintenance with maximum reliability and maximum performance.

Our company produces qualified power generators, engines, pumps, pressure washers and related outdoor power equipment per year to meet customers' various kinds of requirements.

We always look forward to providing customers with better power equipment, with better quality and at more competitive price.



NEW

2-STROKE INVERTER GENERATOR	1
SILENT INVERTER GENERATOR	2-3
OPEN FRAME INVERTER GENERATOR	4-5
4-STROKE GASOLINE GENERATOR	6
2-STROKE GASOLINE GENERATOR	7
4-STROKE GASOLINE GENERATOR	8-12
4-STROKE DUAL FUEL GENERATOR	13
4-STROKE DIESEL GENERATOR	14
DIESEL DIGITAL INVERTER GENERATOR	15
SILENT DIESEL GENERATOR	16-18
INVERTER WELDING GENERATOR	19
WELDING GENERATOR	20-21
ENGINE	22-29
WATER PUMP	30-31
CLEAN WATER PUMP	32-33
HIGH PRESSURE PUMP	34
TRASH PUMP	35-36
CHEMICAL PUMP	37
HIGH PRESSURE WASHER	39-42




INVERTER GENERATOR

Compact design Lightweight(11.5KG only) Stable Power <3%THD

Model:	IG1000
Frequency(Hz):	50 / 60
Rated AC Output(W):	900
Max. AC Output(W):	1000
Fuel Tank Capacity(L):	2.2
Runtime @25% Load (Gas):	Up to 4.5 Hour
Net Weight/Gross Weight(kg):	11.5 / 12.5
Unit Dim(L x W x H)(mm):	334 x 264 x 330
20ft/40ft/40HQ Container Qty:	952 / 1960 / 2240
Gasoline and Oil Mixture Ratio:	50:1 / 40:1
Displacement (cc):	63 / 71
Engine Type:	2-Stroke, Air-Cooled
Max. Output(HP/rpm):	2.0 / 2.2 / 3600



Model:	IG1200s	IG2200s	IG5500s
Displacement (cc):	53.2	79.8	223
Frequency(Hz):	50 / 60	50 / 60	50 / 60
Rated AC Output(W):	1000	1800 / 1700	5000
Max. AC Output(W):	1100	2000	5500
Fuel Tank Capacity(L):	2.4	4.2	10.5
Runtime @25% Load (Gas):	Up to 8 Hour	Up to 10 Hour	Up to 10 Hour
Net Weight/Gross Weight(kg):	13 / 14.5	20 / 22	43.5 / 46.5
Unit Dim(L x W x H)(mm):	460 x 250 x 406	500 x 300 x 460	640 x 459 x 615
20ft/40ft/40HQ Container Qty:	385 / 805 / 805	272 / 544 / 676	120 / 264 / 352
Lubrication Oil:	SF 5w-30, 10w-40	SAE 10W-30	SAE 10W-30
Lubrication Oil Volume(L):	0.4	0.35	0.8
Engine RPM:	5000rpm	Variable 3300-5000rpm	Variable 3300-5400rpm
THD:	<3%	<3%	<3%
Alternator Type:	Permanent Magnet	Permanent Magnet	Permanent Magnet



Parallel link RV Ready Quiet

IG5500s

- ONE BUTTON START
- BUILT-IN FOLDING HANDLE
- 5.5 INCH NEVER FLAT WHEELS
- DUAL VOLTAGE(OPTIONAL)
- REMOTE(OPTIONAL)



ULTRA QUIET 5-MODE INTELLGAUGE



LH10000i

- ▶ ROBUST STRENGTH DESIGN
- ▶ SUPER SILENT(LOW RPM)
- ▶ ONE BUTTON START

Model:	LH2200i	LH4300i	LH10000i
Displacement (cc):	79.8	149	459
Frequency(Hz):	50 / 60	50 / 60	50 / 60
Rated AC Output(W):	1800	3200	8200
Max. AC Output(W):	2000	3500	9100
Fuel Tank Capacity(L):	5	5	30
Runtime @25% Load (Gas):	Up to 12 Hour	Up to 7.5 Hour	Up to 18 Hour
Net Weight/Gross Weight(kg):	20 / 22	23 / 24.7	90 / 96
Unit Dim(L x W x H)(mm):	455 x 290 x 450	500 x 300 x 450	650 x 610 x 750
20ft/40ft/40HQ Container Qty:	300 / 624 / 840	270 / 560 / 700	48 / 153 / 153
Lubrication Oil:	SAE 10W-30	SAE 10W-30	SAE 10W-30
Lubrication Oil Volume(L):	0.35	0.48	1.1
Engine RPM:	Variable 3300-5000rpm	Variable 3400-4500rpm	Variable / 3600rpm
THD:	<3%	<3%	<3%
Alternator Type:	Permanent Magnet	Permanent Magnet	Permanent Magnet



Model:	IG3500M	IG4500F/IG4500Q
Displacement (cc):	212	223
Frequency(Hz):	50 / 60	50 / 60
Rated AC Output(W):	3000	3500
Max. AC Output(W):	3200	3800
Fuel Tank Capacity(L):	6	10
Runtime @25% Load (Gas):	Up to 5 Hour	Up to 6 Hour
Net Weight/Gross Weight(kg):	22.8 / 24.8	28.5 / 30.7
Unit Dim(L x W x H)(mm):	360 x 420 x 465	492 x 402 x 492
20ft/40ft/40HQ Container Qty:	410 / 855 / 855	200 / 428 / 428
Lubrication Oil:	SAE 10W-30	SAE 10W-30
Lubrication Oil Volume(L):	0.6	0.6
Engine RPM:	3600rpm	Variable 2600-3600rpm
THD:	<3%	<3%
Alternator Type:	Permanent Magnet	Permanent Magnet

- M** -Economic series, best for 220~240V market
- F** -Fashion series, best for 110~120V market
- Q** -Quiet series, best for 220~240V market

- 🔋 Stable Power Supply
- ⚡ Advanced Inverter Technology





F -Fashion series, best for 110~120V market
C -Classic series, best for 220~240V market
E -Electric start with battery



Model:	IG7000FE	IG8000CE
Displacement (cc):	321	419
Frequency(Hz):	50 / 60	50 / 60
Rated AC Output(W):	5800	7000
Max. AC Output(W):	6200	7500
Fuel Tank Capacity(L):	15	20
Runtime @25% Load (Gas):	Up to 9 Hour	Up to 8 Hour
Net Weight/Gross Weight(kg):	48 / 52	65 / 68
Unit Dim(L x W x H)(mm):	600 x 450 x 465	605 x 510 x 540
20ft/40ft/40HQ Container Qty:	168 / 336 / 420	144 / 304 / 304
Lubrication Oil:	SAE 10W-30	SAE 10W-30
Lubrication Oil Volume(L):	1.1	1.1
Engine RPM:	Variable 2600-3800rpm	Variable 2600-3600rpm
THD:	<3%	<3%
Alternator Type:	Permanent Magnet	Permanent Magnet



Model:	GG4000N	GG9000N
Frequency (Hz)	50 / 60	50 / 60
Rated output (kW)	3.2 / 3.6	8.5 / 9.0
Max. output (kW)	3.5 / 4.0	9.0 / 9.5
Fuel tank capacity (L)	15	25
Runtime @50% Load	8	6
Net weight / Gross weight (kg)	45 / 48	99 / 106
Unit Dim(L x W x H)(mm)	580 x 450 x 495	730 x 530 x 590
20ft/40ft/40HQ Container Qty	200 / 400 / 500	96 / 192 / 256
Engine type	UP170C	UP194
Displacement (cc)	223	500
Max. output (HP / rpm)	7.5 / 3600	17 / 3600



◆ DUTY HEAVY SERIE ◆ CONTROL PANEL AT SIDE





- 
250W
 Outdoor Light String
- 
250W
 Slow Cooker
- 
600W
 Juicer
- 
600W
 Hand Drill-1/2"
- 
700W
 Mini Refrigerator Freezer



Model:	GG950	GG950-J
Frequency(Hz):	50 / 60	50 / 60
Rated AC Output(W):	650 / 800	650 / 800
Max. AC Output(W):	720 / 900	720 / 900
Noise LevelLwA(4m)dB(A):	95	95
Fuel Tank Capacity(L):	4.2	4.2
Net Weight / Gross Weight(kg):	15.5 / 17	17 / 18.5
Full Continuous Work(h):	5.8 / 4.8	5.8 / 4.8
Unit Dim(LxWxH)(mm):	360 x 305 x 370	360 x 305 x 370
20ft/40ft/40HQ Container Qty:	745 / 1098	745 / 1098
Displacement (cc):	63 / 71	63 / 71
Engine Type:	2-Stroke, Air-Cooled	2-Stroke, Air-Cooled
Max. Output(HP/rpm):	2.0 / 2.2 / 3600	2.0 / 2.2 / 3600

Model:	GG1356M	GG2700M	GG3300M	GG4000M
Frequency (Hz):	50 / 60	50 / 60	50 / 60	50 / 60
Rated output (kW):	1.0 / 1.1	2.0 / 2.2	2.6 / 3.0	3.2 / 3.6
Max. output (kW):	1.1 / 1.2	2.2 / 2.4	3.0 / 3.3	3.5 / 4.0
Fuel tank capacity (L):	6	15	15	15
Runtime @50% Load:	8	11	10	8
Net weight / Gross weight (kg):	23 / 25	38 / 40	41 / 43	46 / 48
Unit Dim(L x W x H)(mm):	455 x 370 x 380	584 x 430 x 445	584 x 430 x 445	584 x 450 x 445
20ft/40ft/40HQ Container Qty:	432 / 900 / 900	245 / 500 / 500	245 / 500 / 500	245 / 500 / 500
Engine type:	UP156	UP170B	UP170B	UP170C
Displacement (cc):	98	212	212	223
Max. output (HP / rpm):	2.7 / 3600	7.2 / 3600	7.2 / 3600	7.5 / 3600




-  BUDGET-FRIENDLY
-  GREAT VALUE






OPTIONAL

✓ Handle and wheel kit

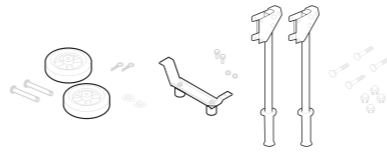

✓ Battery



✓ One-button Start



Model:	GG6200M	GG7200M	GG8200M
Frequency (Hz):	50 / 60	50 / 60	50 / 60
Rated output (kW):	5.0 / 5.5	5.8 / 6.5	7.0 / 7.5
Max. output (kW):	5.5 / 6.0	6.3 / 7.0	7.5 / 8.0
Fuel tank capacity (L):	25	25	25
Runtime @50% Load:	10	9	7
Net weight / Gross weight (kg):	81 / 84	87 / 90	89 / 93
Unit Dim(L x W x H)(mm):	680 x 520 x 540	680 x 520 x 540	680 x 520 x 540
20ft/40ft/40HQ Container Qty:	128 / 272 / 272	128 / 272 / 272	128 / 272 / 272
Engine type:	UP188	UP190	UP192
Displacement (cc):	389	420	459
Max. output (HP / rpm):	13 / 3600	14 / 3600	15 / 3600



GPS SERIES

CLASSIC

Model:	GG1256	GG2650	GG3250
Frequency (Hz):	50 / 60	50 / 60	50 / 60
Rated output (kW):	1.0 / 1.1	2.0 / 2.2	2.6 / 3.0
Max. output (kW):	1.1 / 1.2	2.2 / 2.4	3.0 / 3.3
Fuel tank capacity (L):	6	15	15
Runtime @50% Load:	8	11	10
Net weight / Gross weight (kg):	23 / 25	38 / 40	41 / 43
Unit Dim(L x W x H)(mm):	460 x 370 x 400	600 x 430 x 445	600 x 430 x 445
20ft/40ft/40HQ Container Qty:	360 / 750 / 900	225 / 475 / 475	225 / 475 / 475
Engine type:	UP156	UP170	UP170
Displacement (cc):	98	208	208
Max. output (HP / rpm):	2.7 / 3600	7.0 / 3600	7.0 / 3600

Model:	GG4000B	GG6150E(-3)
Frequency (Hz):	50 / 60	50 / 60
Rated output (kW):	3.2 / 3.6	5.0 / 5.5
Max. output (kW):	3.5 / 4.0	5.5 / 6.0
Fuel tank capacity (L):	15	25
Runtime @50% Load:	8	10
Net weight / Gross weight (kg):	46 / 48	81 / 84
Unit Dim(L x W x H)(mm):	600 x 450 x 445	700 x 530 x 570
20ft/40ft/40HQ Container Qty:	225 / 475 / 475	128 / 256 / 256
Engine type:	UP170C	UP188
Displacement (cc):	223	389
Max. output (HP / rpm):	7.5 / 3600	13 / 3600



Model:	GG7150E(-3)	GG8150E(-3)
Frequency (Hz):	50 / 60	50 / 60
Rated output (kW):	5.8 / 6.5	7.0 / 7.5
Max. output (kW):	6.3 / 7.0	7.5 / 8.0
Fuel tank capacity (L):	25	25
Runtime @50% Load:	9	7
Net weight / Gross weight (kg):	87 / 90	89 / 93
Unit Dim(L x W x H)(mm):	700 x 530 x 570	700 x 530 x 570
20ft/40ft/40HQ Container Qty:	128 / 256 / 256	128 / 256 / 256
Engine type:	UP190	UP192
Displacement (cc):	420	459
Max. output (HP / rpm):	14 / 3600	15 / 3600

Model:	GG2800	GG3400	GG4000D
Frequency (Hz):	50 / 60	50 / 60	50 / 60
Rated output (kW):	2.0 / 2.2	2.6 / 3.0	3.2 / 3.6
Max. output (kW):	2.2 / 2.4	3.0 / 3.3	3.5 / 4.0
Fuel tank capacity (L):	15	15	15
Runtime @50% Load:	11	10	8
Net weight / Gross weight (kg):	38 / 40	41 / 43	46 / 48
Unit Dim(L x W x H)(mm):	598 x 448 x 495	598 x 448 x 495	598 x 448 x 495
20ft/40ft/40HQ Container Qty:	180 / 380 / 475	180 / 380 / 475	180 / 380 / 475
Engine type:	UP170	UP170	UP170C
Displacement (cc):	208	208	223
Max. output (HP / rpm):	7.0 / 3600	7.0 / 3600	7.5 / 3600

UP SERIES

HIGH END SERIES



Model:	GG6300E(-3)	GG7300E(-3)	GG8300E(-3)
Frequency (Hz):	50 / 60	50 / 60	50 / 60
Rated output (kW):	5.0 / 5.5	5.8 / 6.5	7.0 / 7.5
Max. output (kW):	5.5 / 6.0	6.3 / 7.0	7.5 / 8.0
Fuel tank capacity (L):	25	25	25
Runtime @50% Load:	10	9	7
Net weight / Gross weight (kg):	81 / 84	87 / 90	89 / 93
Unit Dim(L x W x H)(mm):	700 x 530 x 580	700 x 530 x 580	700 x 549 x 580
20ft/40ft/40HQ Container Qty:	96 / 192 / 256	96 / 192 / 256	96 / 192 / 256
Engine type:	UP188	UP190	UP192
Displacement (cc):	389	420	459
Max. output (HP / rpm):	13 / 3600	14 / 3600	15 / 3600



Model:	GG4000KD	GG8000KD
Frequency (Hz):	50 / 60	50 / 60
GAS Rated output (kW):	3.2 / 3.6	7.0 / 7.5
GAS Max. output (kW):	3.5 / 4.0	7.5 / 8.0
LPG Rated output (kW):	2.8 / 3.2	6.4 / 6.8
LPG Max. output (kW):	3.1 / 3.6	6.8 / 7.3
Fuel tank capacity (L):	15	15
Runtime @50% Load (Gas):	8	7
Net weight / Gross weight (kg):	52 / 55	95 / 99
Unit Dim(L x W x H)(mm):	600 x 450 x 445	700 x 530 x 570
20ft/40ft/40HQ Container Qty:	225 / 475 / 475	96 / 192 / 256
Engine type:	UP170C	UP192
Displacement (cc):	223	459
Max. output (HP / rpm):	7.5 / 3600	15 / 3600



PLENTY OF POWER



Model:	DG3600	DG5500(-3)	DG7500(-3)	DG9000(-3)
Frequency (Hz):	50 / 60	50 / 60	50 / 60	50 / 60
Rated output (kW):	2.8 / 3.0	4.5 / 5.0	6.0 / 6.2	8.0 / 8.2
Max. output (kW):	3.0 / 3.3	5.0 / 5.5	6.5 / 6.8	8.5 / 8.8
Fuel tank capacity (L):	11.5	11.5	11.5	11.5
Runtime @50% Load:	9	6	5	4
Net weight / Gross weight (kg):	81 / 85	105 / 109	118 / 124	126 / 131
Unit Dim(L x W x H)(mm):	680 x 460 x 550	710 x 480 x 575	710 x 500 x 605	740 x 530 x 670
20ft/40ft/40HQ Container Qty:	160 / 340 / 340	144 / 288 / 288	99 / 207 / 276	90 / 198 / 198
Engine type:	UD178	UD186	UD192	UD1100
Displacement (cc):	296	418	498	656
Max. output (HP / rpm):	6.7 / 3600	10 / 3600	15 / 3600	18 / 3600

OPEN FRAME DIESEL GENERATOR





-  Diesel Power & Advanced Inverter Technology
-  Integrated Protective Cover
-  Rain & Dust Proof Design
-  Ultra-Quiet Operation
-  Robust & Reliable Construction




DG5500S 

-  Protective Cover Design
-  Rain & Dust Proof
-  Low-Noise Operation
-  Heavy-Duty Construction



Model:

	 TOP PICK DG6000Si
Frequency (Hz):	50 / 60
Rated output (kW):	5.8 / 6.0
Max. output (kW):	6.0 / 6.2
Fuel tank capacity (L):	10
Runtime @50% Load:	7
Net weight / Gross weight (kg):	118 / 135
Unit Dim(L x W x H)(mm):	680 x 460 x 550
20ft/40ft/40HQ Container Qty:	160 / 340 / 340
Engine type:	UD188
Displacement (cc):	456
Max. output (HP / rpm):	13 / 3600

Model:

	DG5500S(-3)
Frequency (Hz):	50 / 60
Rated output (kW):	4.2 / 5.0
Max. output (kW):	4.6 / 5.5
Fuel tank capacity (L):	16
Runtime @50% Load:	8
Net weight / Gross weight (kg):	141 / 150
Unit Dim(L x W x H)(mm):	925 x 545 x 705
20ft/40ft/40HQ Container Qty:	48 / 96
Engine type:	UD186
Displacement (cc):	418
Max. output (HP / rpm):	10 / 3600



-  Protective Cover Design
-  Rain & Dust Proof
-  Low-Noise Operation
-  Heavy-Duty Construction

Model:	DG8000S(-3)	DG12000S(-3)
Frequency (Hz):	50 / 60	50 / 60
Rated output (kW):	6.0 / 6.2	9.2
Max. output (kW):	6.4 / 6.7	9.7
Fuel tank capacity (L):	22	22
Runtime @50% Load:	15	10
Net weight / Gross weight (kg):	165 / 188	180 / 212
Unit Dim(L x W x H)(mm):	1090 x 635 x 865	1105 x 635 x 940
20ft/40ft/40HQ Container Qty:	36 / 72 / 108	36 / 72 / 72
Engine type:	UD192	UD1103
Displacement (cc):	498	732
Max. output (HP / rpm):	15 / 3600	19 / 3600

Model:	DG14000S(-3)
Frequency (Hz):	50 / 60
Rated output (kW):	10.0
Max. output (kW):	11.0
Fuel tank capacity (L):	30
Runtime @50% Load:	11
Net weight / Gross weight (kg):	304 / 345
Unit Dim(L x W x H)(mm):	1250 x 650 x 900
20ft/40ft/40HQ Container Qty:	26 / 54 / 54
Engine type:	UD292
Displacement (cc):	997
Max. output (HP / rpm):	21 / 3600

- Integrated design of electricity generate and electric welding
- Standard equipped with electric starter and battery




- Welding Max. 60% continuous working time
- IGBT automatic current regulation module

Model:	GW220AEI
Frequency (Hz):	50 / 60
AC Rated output (kW):	7.0 / 7.5
AC Max. output (kW):	7.5 / 8.0
Weld unloaded voltage (V):	68 - 75
Weld rated voltage (V):	22 - 30
Weld current adjustable scope (A):	20 - 180
Weld continue load rate (%):	60
Weld rod (mm):	1.6 / 2.0 / 2.5 / 3.2 / 4.0 / 5.0
Fuel tank capacity (L):	25
Runtime @50% Load:	7
Net weight / Gross weight (kg):	95 / 99
Unit Dim(L x W x H)(mm):	700 x 540 x 570
Engine type:	UP192
Displacement:	459 cc
Max. output (HP / rpm):	15 / 3600



Model:	IW160T	IW200T
Frequency (Hz):	50 / 60	50 / 60
AC Rated output (kW):	0.8	2.0
AC Max. output (kW):	1.0	2.5
Weld unloaded voltage (V):	45 - 60	45 - 60
Weld rated voltage (V):	22 - 30	22 - 30
Weld current adjustable scope (A):	40 / 60 / 90 / 120	0 / 60 / 90 / 120 / 160 / 190
Weld continue load rate (%):	60	60
Weld rod (mm):	1.6 / 2.0 / 2.5 / 3.2	1.6 / 2.0 / 2.5 / 3.2 / 4.0
Fuel tank capacity (L):	6	25
Runtime @50% Load:	3	9
Net weight / Gross weight (kg):	36 / 38	76 / 79
Unit Dim(L x W x H)(mm):	450 x 425 x 420	650 x 600 x 550
Engine type:	UP170C	UP190
Displacement:	223 cc	420 cc
Max. output (HP / rpm):	7.5 / 3600	14 / 3600



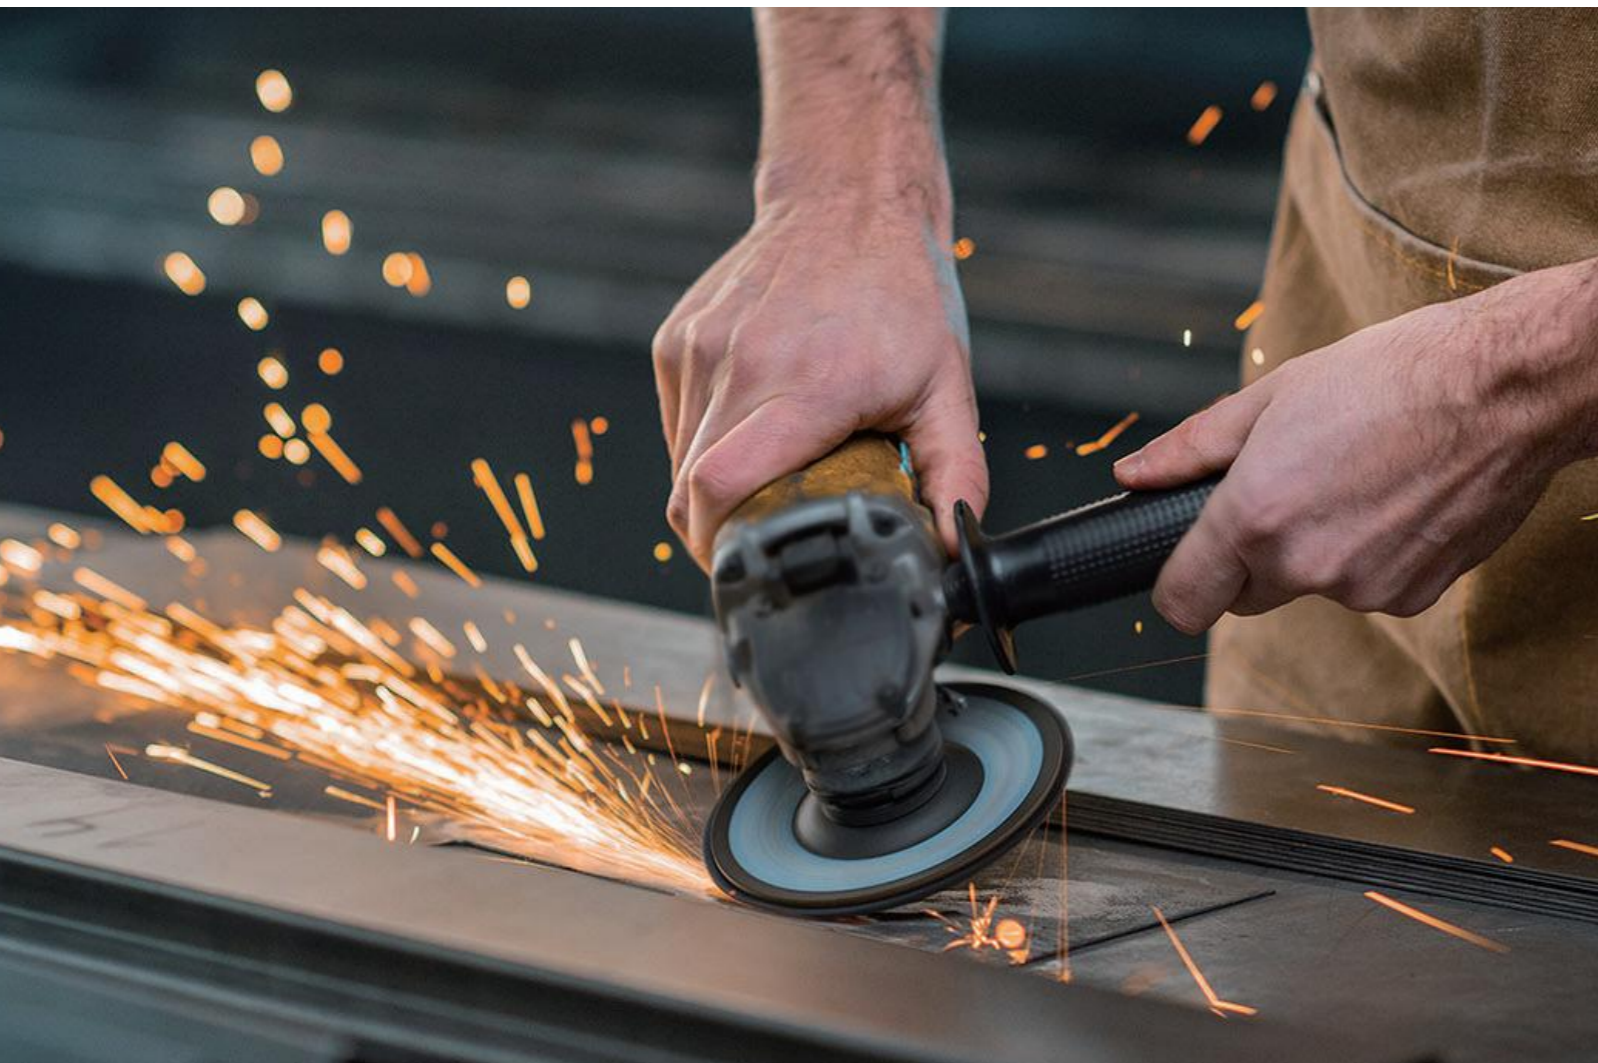

- Integrated design of electricity generate and electric welding
- Welding Max. 50% continuous working time

Model:	DW190AE
Frequency (Hz):	50 / 60
AC Rated output (kW):	4.2 / 5.0
AC Max. output (kW):	4.5 / 5.5
Weld unloaded voltage (V):	68 - 75
Weld rated voltage (V):	22 - 30
Weld current adjustable scope (A):	50 - 160
Weld continue load rate (%):	60
Weld rod (mm):	1.6 / 2.0 / 2.5 / 3.2 / 4.0
Fuel tank capacity (L):	11.5
Runtime @50% Load:	6
Net weight / Gross weight (kg):	105 / 109
Unit Dim(L x W x H)(mm):	720 x 480 x 620
Engine type:	UD186
Displacement:	418 cc
Max. output (HP / rpm):	10 / 3600




HEAVY-DUTY APPLICATIONS



- Reduced vibration
- High reliability and long-term use

Model:	UP168-1
Displacement:	163 cc
Bore x Stroke (mm):	68 x 45
Max.Output (HP) /rpm:	5.5 / 3600
Fuel Consumption (g/kWh):	≤395
Fuel Oil Tank Capacity (L):	3.6
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	0.6
Net Weight / Gross Weight (kg):	13 / 15.5
Unit Dim (L x W x H) (mm):	350 x 300 x 330
20ft/40ft Container Qty:	512 / 1065
Starting System:	Recoil / Electric

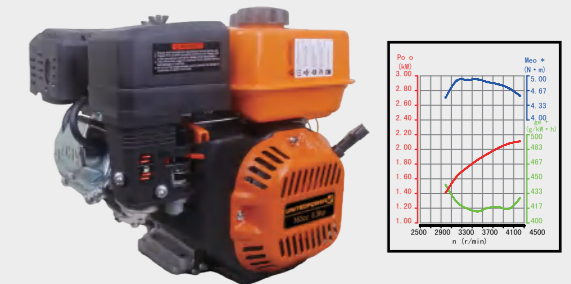

- Recoil
- Electric



WATER PUMP



ROLLER



CONCRETE MIXER



CLEANING MACHINE



FARMING MACHINES




GENERATOR


ANTI-CORROSION ENGINE

new

- Plastic fuel tank
- Muffler sprayed with anti-corrosion paint
- Suitable for seaside and marine motor

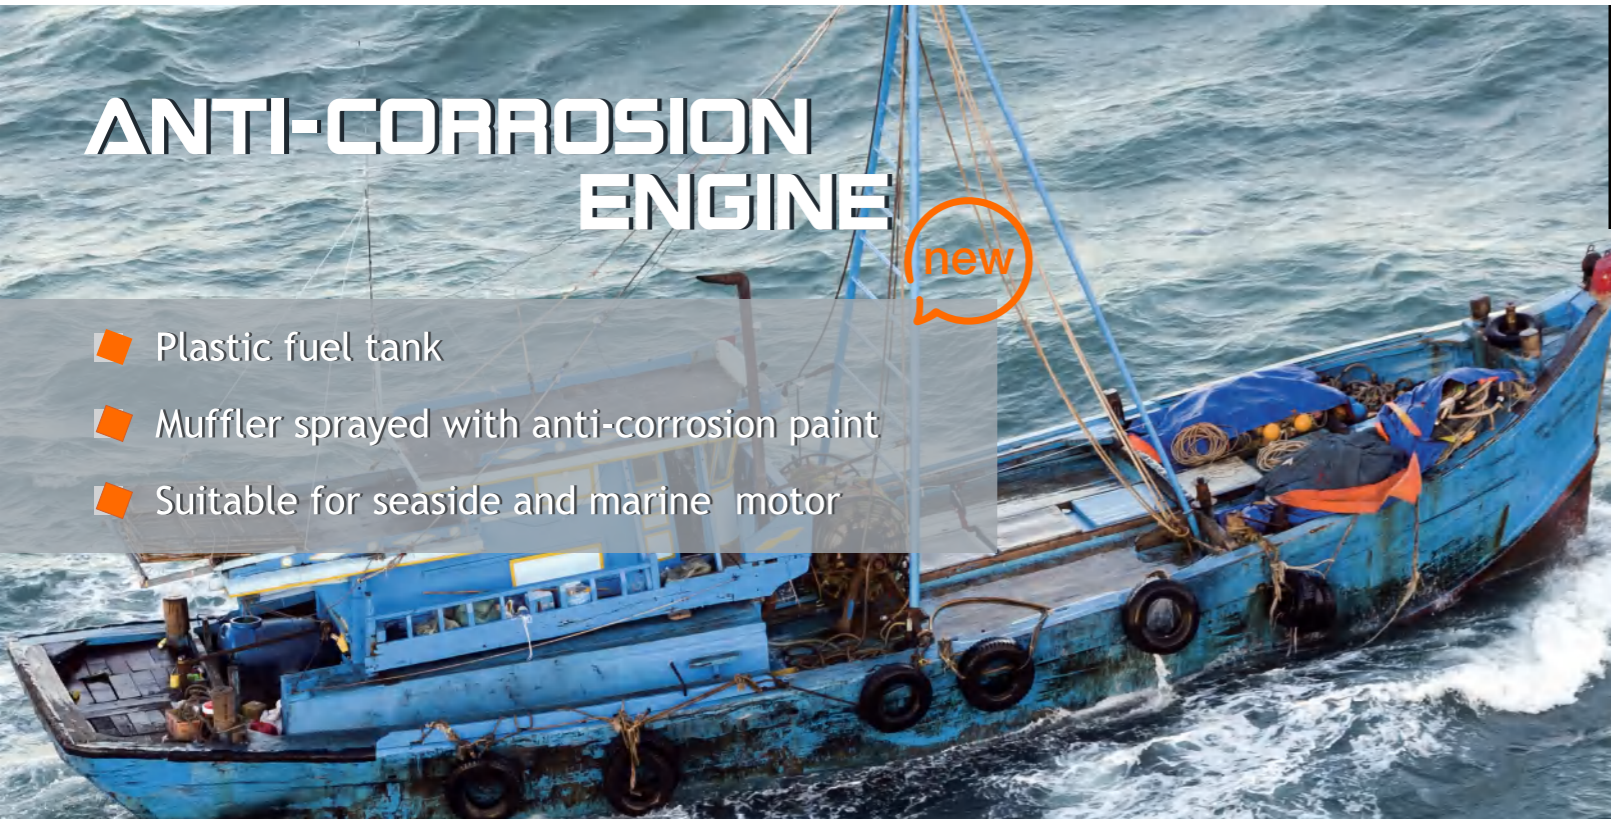


Model:	UP190E
Displacement :	420 cc
Bore x Stroke (mm):	90 x 66
Max.Output (HP) /rpm:	14 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	32.2 / 33
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil /Electric




Recoil Electric

Model:	UP192E
Displacement:	459 cc
Bore x Stroke (mm):	92 x 69
Max.Output (HP) /rpm:	15 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	34.2 / 35
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil / Electric



Recoil Electric

Model:	UP152 / UP156
Displacement:	79.8 cc / 98 cc
Bore x Stroke (mm):	52 x 37.6 / 56 x 40
Max.Output (HP) /rpm:	2.1 / 3600 2.7 / 3600
Fuel Consumption (g/kWh):	≤450
Fuel Oil Tank Capacity (L):	1.6
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	0.4
Net Weight / Gross Weight (kg):	9.9 / 11.5
Unit Dim (L x W x H) (mm):	310 x 280 x 300
20ft/40ft Container Qty:	594 / 1200
Starting System:	Recoil




Recoil Electric

Model:	UP170 / UP170B
Displacement:	208 cc / 212 cc
Bore x Stroke (mm):	70 x 54 / 70 x 55
Max.Output (HP) /rpm:	7.0 / 3600 7.2 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	3.6
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	0.6
Net Weight / Gross Weight (kg):	13.5 / 16.0
Unit Dim (L x W x H) (mm):	350 x 300 x 330
20ft/40ft Container Qty:	512 / 1065
Starting System:	Recoil / Electric




TOP PICK




Recoil Electric

Model:	UP170C
Displacement:	223 cc
Bore x Stroke (mm):	70 x 58
Max.Output (HP) /rpm:	7.5 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	3.6
Lubrication Oil:	SAE 10W / 30
Lubrication Oil Volume (L):	0.6
Net Weight / Gross Weight (kg):	15.3 / 17.9
Unit Dim (L x W x H) (mm):	350 x 300 x 330
20ft/40ft Container Qty:	512 / 1065
Starting System:	Recoil / Electric




Recoil Electric

Model:	UP188
Displacement:	389 cc
Bore x Stroke (mm):	88 x 64
Max.Output (HP) /rpm:	13 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	32.2 / 33
Unit Dim (L x W x H) (mm):	542 x 500 x 507
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil / Electric




Recoil Electric

Model:	UP190
Displacement:	420 cc
Bore x Stroke (mm):	90 x 66
Max.Output (HP) /rpm:	14 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	32.2 / 33
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil /Electric




Recoil Electric

Model:	UP192
Displacement:	459 cc
Bore x Stroke (mm):	92 x 69
Max.Output (HP) /rpm:	15 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	/
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	34.2/35
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil / Electric




Recoil Electric

Model:	UD170
Displacement:	211 cc
Bore x Stroke (mm):	70 x 55
Max.Output (HP) /rpm:	4.7 / 3600
Fuel Consumption (g/kWh):	≤288.3
Fuel Oil Tank Capacity (L):	2.4
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	0.8
Net Weight / Gross Weight (kg):	29 / 34
Unit Dim (L x W x H) (mm):	427 x 380 x 462
20ft/40ft Container Qty:	400 / 830
Starting System:	Recoil / Electric




Recoil Electric

Model:	UD178
Displacement:	296 cc
Bore x Stroke (mm):	78 x 62
Max.Output (HP) /rpm:	6.7 / 3600
Fuel Consumption (g/kWh):	≤285.6
Fuel Oil Tank Capacity (L):	3.3
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	35 / 39
Unit Dim (L x W x H) (mm):	440 x 360 x 460
20ft/40ft Container Qty:	240 / 508
Starting System:	Recoil / Electric



Recoil Electric


Model:	UD186
Displacement:	418 cc
Bore x Stroke (mm):	86 x 72
Max.Output (HP) /rpm:	10 / 3600
Fuel Consumption (g/kWh):	≤ 285.7
Fuel Oil Tank Capacity (L):	5.4
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	1.65
Net Weight / Gross Weight (kg):	50 / 55
Unit Dim (L x W x H) (mm):	460 x 410 x 510
20ft/40ft Container Qty:	192 / 400
Starting System:	Recoil /Electric



Recoil Electric




Model:	UD188
Displacement:	456 cc
Bore x Stroke (mm):	88 X 75
Max.Output (HP) /rpm:	13 / 3600
Fuel Consumption (g/kWh):	≤285.7
Fuel Oil Tank Capacity (L):	5.4
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	1.65
Net Weight / Gross Weight (kg):	50 / 55
Unit Dim (L x W x H) (mm):	460 x 410 x 510
20ft/40ft Container Qty:	192 / 400
Starting System:	Recoil / Electric



Recoil Electric

Model:	UD192
Displacement:	498 cc
Bore x Stroke (mm):	92 X 75
Max.Output (HP) /rpm:	15 / 3600
Fuel Consumption (g/kWh):	≤285.7
Fuel Oil Tank Capacity (L):	5.4
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	1.65
Net Weight / Gross Weight (kg):	51 / 56
Unit Dim (L x W x H) (mm):	525 x 480 x 562
20ft/40ft Container Qty:	192 / 400
Starting System:	Recoil / Electric



Recoil Electric





GASOLINE ENGINE PTO DIAGRAM

MODEL	UP152/UP156	UP170/UP170C	UP188/UP190/UP192
PTO			
Keyway Shaft			
Thresd Shaft			
Taper Shaft			

NEW **NEW SERIES**
WATER PUMP

- ◆ Attractive long frame
- ◆ Convenient switch
- ◆ Fire prevention
- ◆ Easy to maintain

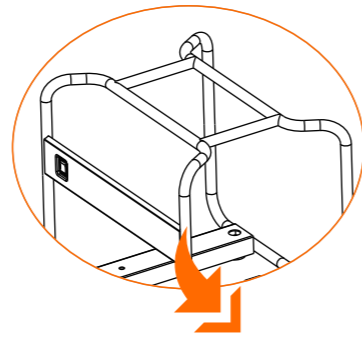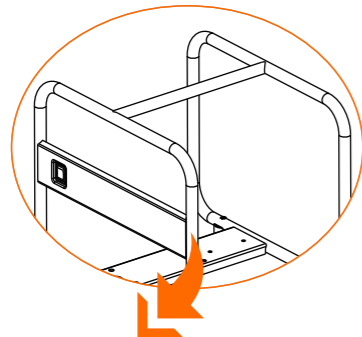

Model:	GP50	GHP50	GTP80
Displacement:	208 cc	208 cc	208 cc
Suction (in):	50(2in)	50(2in)	80(3in)
Discharge Port Dia (mm):	50	50	80
Maximum Capacity (m ³ /h):	36	25	65
Self-Priming Time (s/4m):	70	60	120
Max,Head (m):	28	58	26
Max.Suction Head (m):	8	5	8
Net Weight / Gross Weight(kg):	22.5 / 24.5	26 / 28	35 / 38
Unit Dim (L x W x H) (mm):	482 x 387 x 410	500 x 400 x 440mm	545 x 420 x 450
20ft/40ft Container Qty:	360 / 750	305 / 625	208 / 428
Engine:	UP170	UP170	UP170
Max, Output (HP/rpm):	7 / 3600	7 / 3600	7 / 3600
Fuel Tank Capacity (L):	3.6	3.6	3.6
Lubrication Oil Volume (L):	0.6	0.6	0.6



Model:	GP25	GP40	GP50
Displacement:	33.5 cc	79.8 / 98 cc	208 cc
Suction (in):	25(1in)	40(1.5in)	50(2in)
Discharge Port Dia (mm):	25	40	50
Maximum Capacity (m ³ /h):	8	18	36
Self-Priming Time (s/4m):	50	55	70
Max,Head (m):	26	24	28
Max.Suction Head (m):	8	8	8
Net Weight / Gross Weight(kg):	7.5 / 9	16.5 / 18.5	21 / 23
Unit Dim (L x W x H) (mm):	356 x 250 x 347	436 x 312 x 404	466 x 376 x 398
20ft/40ft Container Qty:	485 / 1000	370 / 760	360 / 750
Engine:	139F	UP152 / UP156	UP170
Max, Output (HP/rpm):	1.0 / 6000	2.1 / 2.7 / 3600	7 / 3600
Fuel Tank Capacity (L):	0.65	1.6	3.6
Lubrication Oil Volume (L):	0.1	0.4	0.6




Model:	GP80	GP100	GP100D
Displacement:	208 cc	270 cc	223 cc
Suction (in):	80(3in)	100(4in)	100(4in)
Discharge Port Dia (mm):	80	100	100
Maximum Capacity (m ³ /h):	60	106	75
Self-Priming Time (s/4m):	120	180	180
Max,Head (m):	26	26	26
Max.Suction Head (m):	6	6	6
Net Weight / Gross Weight(kg):	25 / 27	41 / 44	25.5 / 28
Unit Dim (L x W x H) (mm):	500 x 400 x 430	620 x 450 x 540	525 x 400 x 500
20ft/40ft Container Qty:	305 / 625	180 / 372	224 / 464
Engine:	UP170	UP177	UP170C
Max, Output (HP/rpm):	7 / 3600	9 / 3600	7.5 / 3600
Fuel Tank Capacity (L):	3.6	6.5	3.6
Lubrication Oil Volume (L):	0.6	1.1	0.6

- ◆ Portable and durable
- ◆ Irrigation of gardens and plots
- ◆ Temporary water supply for various facilities



- 1. FUEL TANK
- 2. FRAME
- 3. RECOIL STARTER
- 4. INLET
- 5. OUTLET
- 6. MUFFLER

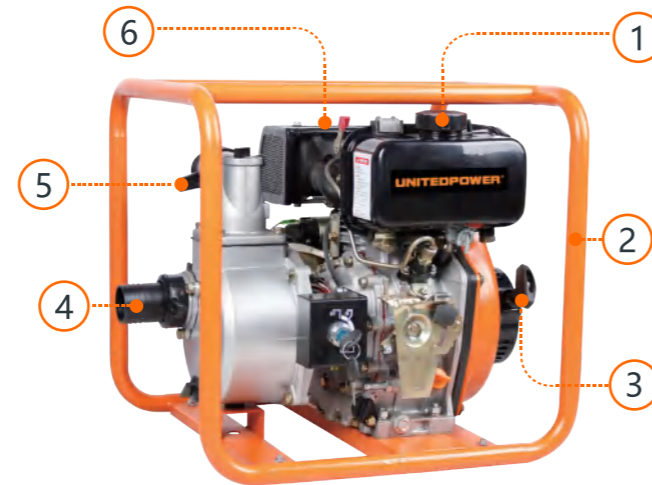

Model:	DP50E	DP80E	DP100E
Displacement:	211 cc	296 cc	418 cc
Suction (in):	50(2in)	80(3in)	100(4in)
Discharge Port Dia (mm):	50	80	100
Maximum Capacity (m ³ /h):	35	60	106
Self-Priming Time (s/4m):	70	120	180
Max,Head (m):	26	26	26
Max.Suction Head (m):	8	6	6
Net Weight / Gross Weight (kg):	42 / 45	52 / 55	73 / 76
Unit Dim (L x W x H) (mm):	510 x 440 x 485	540 x 455 x 525	645 x 475 x 610
20ft/40ft Container Qty:	224 / 460	192 / 384	123 / 252
Engine:	UD170E	UD178E	UD186E
Max, Output (HP/rpm):	4.7 / 3600	6.7 / 3600	10 / 3600
Fuel Tank Capacity(L):	2.4	3.3	5.4
Lubrication Oil Volume(L):	0.8	1.1	1.65



Model:	GHP40	GHP50
Displacement:	208 cc	208 cc
Suction (in):	40(1.5in)	50(2in)
Discharge Port Dia (mm):	40 x 1; 25 x 2	50
Maximum Capacity (m ³ /h):	18	25
Self-Priming Time (s/4m):	65	60
Max,Head (m):	55	58
Max.Suction Head (m):	5	5
Net Weight / Gross Weight (kg):	23 / 25	27 / 29
Unit Dim (L x W x H) (mm):	500 x 400 x 430	500 x 400 x 430
20ft/40ft Container Qty:	275 / 575	305 / 625
Engine:	UP170	UP170
Max, Output (HP/rpm):	7 / 3600	7 / 3600
Fuel Tank Capacity(L):	3.6	3.6
Lubrication Oil Volume(L):	0.6	0.6




Model:	DHP40E	DHP50E
Displacement:	296 cc	296 cc
Suction (in):	40(1.5in)	50(2in)
Discharge Port Dia (mm):	40 x 1; 25 x 2	50
Maximum Capacity (m ³ /h):	18	25
Self-Priming Time (s/4m):	65	60
Max,Head (m):	55	52
Max.Suction Head (m):	5	5
Net Weight / Gross Weight (kg):	42 / 45	53 / 56
Unit Dim (L x W x H) (mm):	540 x 455 x 525	540 x 455 x 525
20ft/40ft Container Qty:	192 / 384	192 / 384
Engine:	UD178E	UD178E
Max, Output (HP/rpm):	6.7 / 3600	6.7 / 3600
Fuel Tank Capacity(L):	3.3	3.3
Lubrication Oil Volume(L):	1.1	1.1



◆ Duty heavy series ◆ Durable construction ◆ Sufficient power



- 1. FUEL TANK
- 2. FRAME
- 3. RECOIL STARTER
- 4. INLET
- 5. OUTLET
- 6. MUFFLER

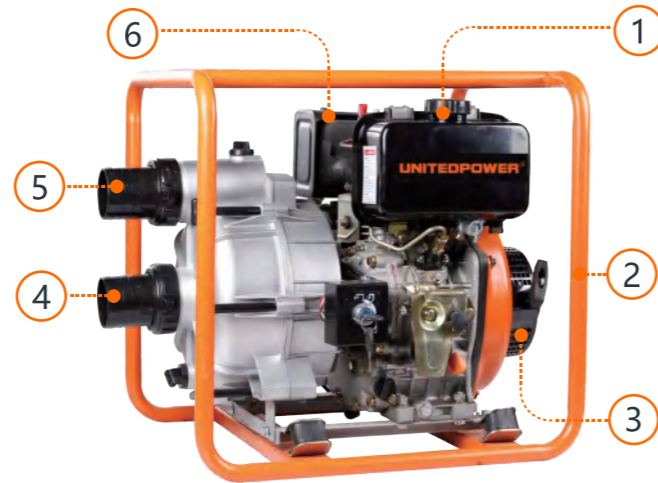

Model:	DTP80E
Displacement:	296 cc
Suction (in):	80(3in)
Discharge Port Dia (mm):	80
Maximum Capacity(m ³ /h):	65
Self-Priming Time (s/4m):	120
Max,Head (m):	26
Max.Suction Head (m):	8
Net Weight / Gross Weight (kg):	58 / 61
Unit Dim (L x W x H) (mm):	570 x 455 x 550
20ft/40ft Container Qty:	168 / 408
Engine:	UD178E
Max, Output (HP/rpm):	6.7 / 3600
Fuel Tank Capacity(L):	3.3
Lubrication Oil Volume(L):	1.1



Model:	GTP50A	GTP80A	GTP100A
Displacement:	208 cc	270 cc	389 cc
Suction (in):	50(2in)	80(3in)	100(4in)
Discharge Port Dia (mm):	50	80	100
Maximum Capacity (m ³ /h):	36	65	104
Self-Priming Time (s/4m):	70	120	180
Max,Head (m):	26	26	26
Max.Suction Head (m):	8	8	6
Net Weight / Gross Weight(kg):	31 / 33	54 / 58	70 / 77
Unit Dim (L x W x H) (mm):	517 x 435 x 415	655 x 500 x 595	695 x 540 x 570
20ft/40ft Container Qty:	293 / 586	111 / 222	126 / 258
Engine:	UP170	UP177	UP188
Max, Output (HP/rpm):	7 / 3600	9 / 3600	13 / 3600
Fuel Tank Capacity (L):	3.6	6.5	6.5
Lubrication Oil Volume (L):	0.6	1.1	1.1



OPTIONAL



PS:Weight +3kg



Model:	GTP80	GTP100E+B+W
Displacement:	208 cc	389 cc
Suction (in):	80(3in)	100(4in)
Discharge Port Dia (mm):	80	100
Maximum Capacity (m ³ /h):	65	100
Self-Priming Time (s/4m):	120	180
Max,Head (m):	26	26
Max.Suction Head (m):	8	8
Net Weight / Gross Weight(kg):	35 / 38	57/60
Unit Dim (L x W x H) (mm):	545 x 440 x 448	635 x 585 x 605
20ft/40ft Container Qty:	208 / 428	156 / 332
Engine:	UP170	UP188
Max, Output(HP/rpm):	7 / 3600	13 / 3600
Fuel Tank Capacity(L):	3.6	6.5
Lubrication Oil Volume(L):	0.6	1.1




- ◆ With strong corrosion resistance. Suitable for sea water, weak acid, chemical liquid.
- ◆ Sufficiently powered
- ◆ Minimized vibration




Model:	GCP50	GCP80
Displacement:	223 cc	223 cc
Suction (in):	50(2in)	80 / 3in
Discharge Port Dia (mm):	50	80
Maximum Capacity (m ³ /h):	36	60
Self-Priming Time (s/4m):	50	55
Max,Head (m):	35	28
Max.Suction Head (m):	8	8
Net Weight / Gross Weight (kg):	24 / 26	25 / 27
Unit Dim (L x W x H) (mm):	532 x 420 x 450	590 x 420 x 450
20ft/40ft Container Qty:	270 / 560	220 / 475
Engine:	UP170C	UP170C
Max, Output (HP/rpm):	7.5 / 3600	7.5 / 3600
Fuel Tank Capacity (L):	3.6	3.6
Lubrication Oil Volume (L):	0.6	0.6


SELECTION GUIDE

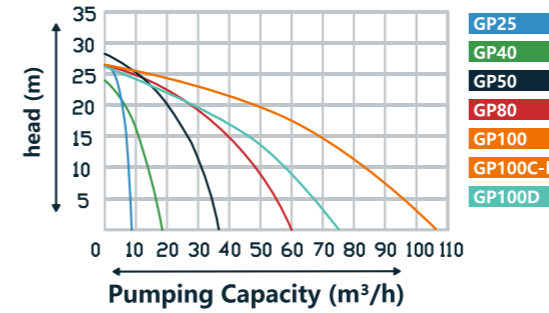


GASOLINE WATER PUMPS SERIES

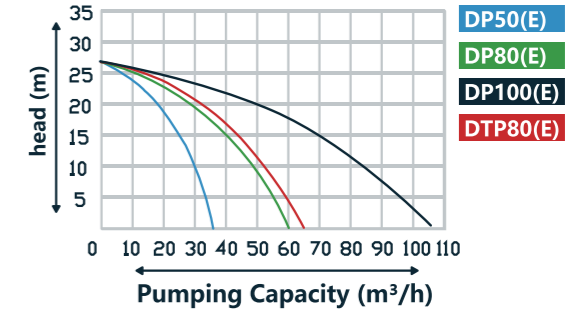


DIESEL WATER PUMPS SERIES

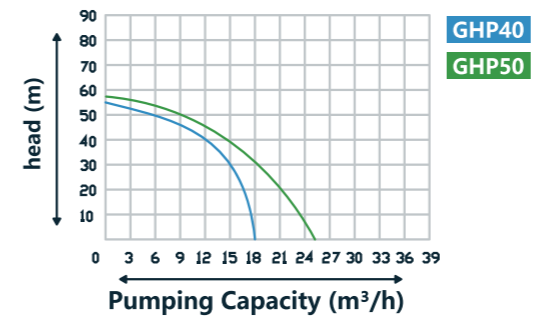


GASOLINE HIGH PRESSURE PUMPS SERIES

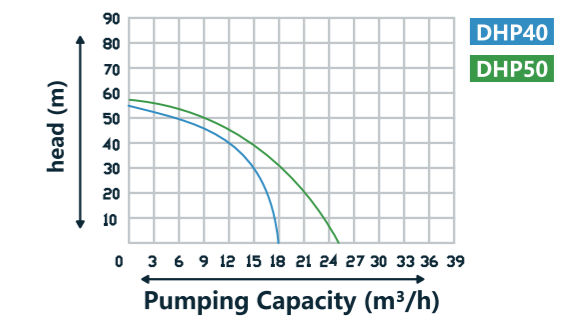

DIESEL HIGH PRESSURE PUMPS SERIES

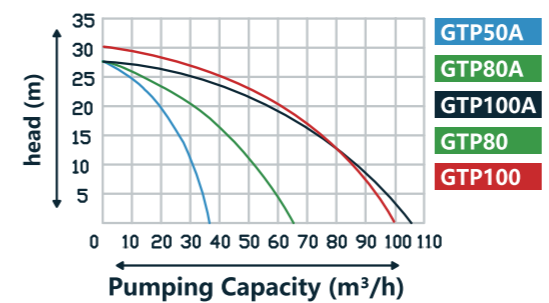


GASOLINE TRASH PUMPS SERIES

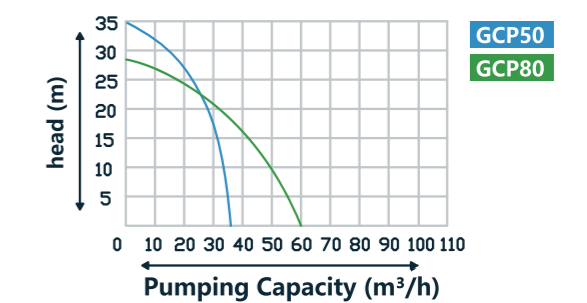

GASOLINE CHEMICAL PUMP SERIES

USE THE SKETCH MAP

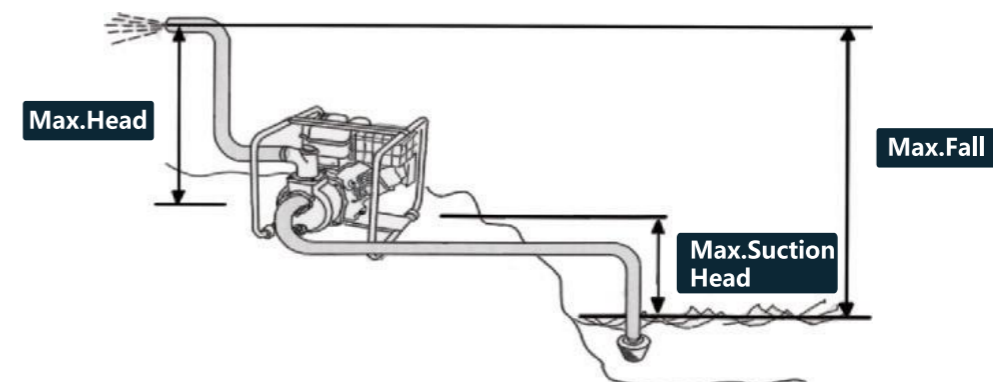



0°

Delivers a concentrated stream that can gouge or cut



15°

scraper when used at a 15° angle



25°

Most common nozzle for general cleaning applications



40°

Wide spray for washing or rinsing a large area



65°

Low pressure nozzle for use with detergent injector

◆ Stable and little vibration

◆ Economical and practical



VERTICAL HIGH PRESSURE WASHER



Model:	GPW3000A	GPW3200A	TOP PICK GPW3500A
Displacement:	212 cc	212 cc	223 cc
Rated Flow (GPM/LPM):	2.3 / 8.71	2.5 / 9.5	2.7 / 10.3
Pump Type:	Axial cam / Brass head	Axial cam / brass head	Axial cam / brass head
Rated pressure (psi/bar):	2500 / 173	2700 / 186	3000 / 207
Allowable Pressure (psi/bar):	3000 / 207	3200 / 220	3500 / 242
Max Water Temperature (°C):	60	60	60
Hose Length (m):	7.1	7.1	7.1
Net Weight / Gross Weight (kg):	25/28.5	25/28.5	27 / 30.5
Unit Dim (L x W x H) (mm):	660 x 496 x 965	660 x 496 x 965	660 x 496 x 965
Engine:	UP170B	UP170B	UP170C
Max. Output (HP/rpm):	7.2 / 3600	7.2 / 3600	7.5 / 3600
Fuel Tank Capacity (L):	3.6	3.6	3.6
Lubrication Oil Volume (L):	0.6	0.6	0.6

HORIZONTAL HIGH PRESSURE WASHER



- Powerful Engines
- Multi-Functional High Pressure Flushing
- Smart & Portable Design

 OPTIONAL



 **TOP PICK**
GPW3200H

Model:	GPW3000H	GPW3200H	GPW3500H
Displacement:	212 cc	212 cc	223 cc
Rated Flow (GPM/LPM):	2.3 / 8.71	2.5 / 9.5	2.7 / 10.3
Pump Type:	Axial cam / Aluminum head	Axial cam / brass head	Axial cam / brass head
Rated pressure (psi/bar):	2500 / 173	2700 / 186	3000 / 207
Allowable Pressure (psi/bar):	3000 / 207	3200 / 220	3500 / 242
Max Water Temperature (°C):	60	60	60
Hose Length (m):	7.1	7.1	7.1
Net Weight / Gross Weight (kg):	30.5 / 34	31 / 34.5	31.5 / 35
Unit Dim (L x W x H) (mm):	955 x 560 x 722	955 x 560 x 722	955 x 560 x 722
Engine:	UP170B	UP170B	UP170C
Max. Output (HP/rpm):	7.2 / 3600	7.2 / 3600	7.5 / 3600
Fuel Tank Capacity (L):	3.6	3.6	3.6
Lubrication Oil Volume (L):	0.6	0.6	0.6

Model:	GPW3000	GPW3200
Displacement (cc):	223 cc	223 cc
Rated Flow (GPM/LPM):	3.0 / 11.4	3.3 / 12.6
Pump Type:	Triplex plunger / brass head	Triplex plunger / brass head
Rated pressure (psi/bar):	2600 / 179	2600 / 179
Allowable Pressure (psi/bar):	3000 / 207	3200 / 220
Max Water Temperature (°C):	60	60
Hose Length (m):	7.1	7.1
Net Weight / Gross Weight (kg):	33 / 36.5	33 / 36.5
Unit Dim (L x W x H) (mm):	955 x 560 x 722	955 x 560 x 722
Engine:	UP170C	UP170C
Max. Output (HP/rpm):	7.5 / 3600	7.5 / 3600
Fuel Tank Capacity (L):	3.6	3.6
Lubrication Oil Volume (L):		



Model:	GPW3600E	GPW4000E
Displacement (cc):	420 cc	459 cc
Rated Flow (GPM/LPM):	4.0 / 15.3	4.5 / 17.1
Pump Type:	Triplex plunger / brass head	Triplex plunger / brass head
Rated pressure (psi/bar):	2900 / 200	3200 / 220
Allowable Pressure (psi/bar):	3600 / 248	4000 / 276
Max Water Temperature (°C):	60	60
Hose Length (m):	7.1	7.1
Net Weight / Gross Weight (kg):	57.5 / 61.5	59.5 / 63.5
Unit Dim (L x W x H) (mm):	1078 x 594 x 739	1078 x 594 x 739
Engine:	UP190E	UP192E
Max. Output (HP/rpm):	14 / 3600	15 / 3600
Fuel Tank Capacity (L):	6.5	6.5
Lubrication Oil Volume (L):	1.1	1.1