


HEAVY-DUTY APPLICATIONS



Reduced vibration

High reliability and long-term use

Model:	UP168-1
Displacement:	163 cc
Bore x Stroke (mm):	68 x 45
Max.Output (HP) /rpm:	5.5 / 3600
Fuel Consumption (g/kWh):	≤395
Fuel Oil Tank Capacity (L):	3.6
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	0.6
Net Weight / Gross Weight (kg):	13 / 15.5
Unit Dim (L x W x H) (mm):	350 x 300 x 330
20ft/40ft Container Qty:	512 / 1065
Starting System:	Recoil / Electric



Recoil Electric



WATER PUMP



ROLLER



CONCRETE MIXER



CLEANING MACHINE



FARMING MACHINES





GENERATOR


ANTI-CORROSION ENGINE

new

- Plastic fuel tank
- Muffler sprayed with anti-corrosion paint
- Suitable for seaside and marine motor

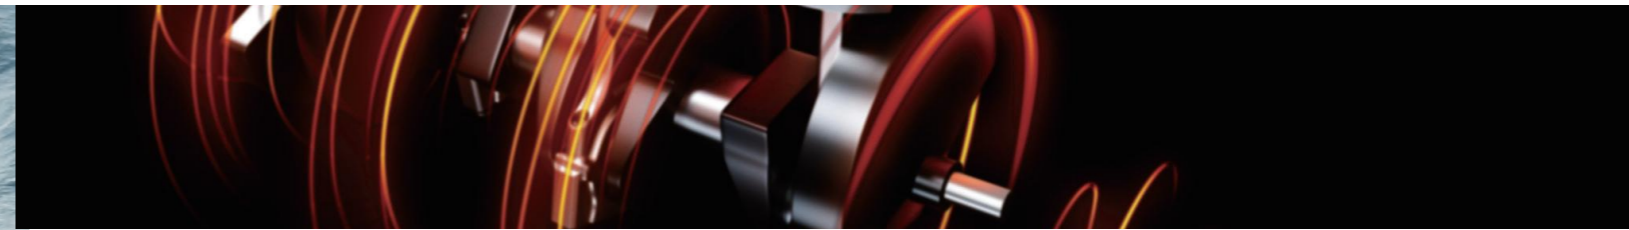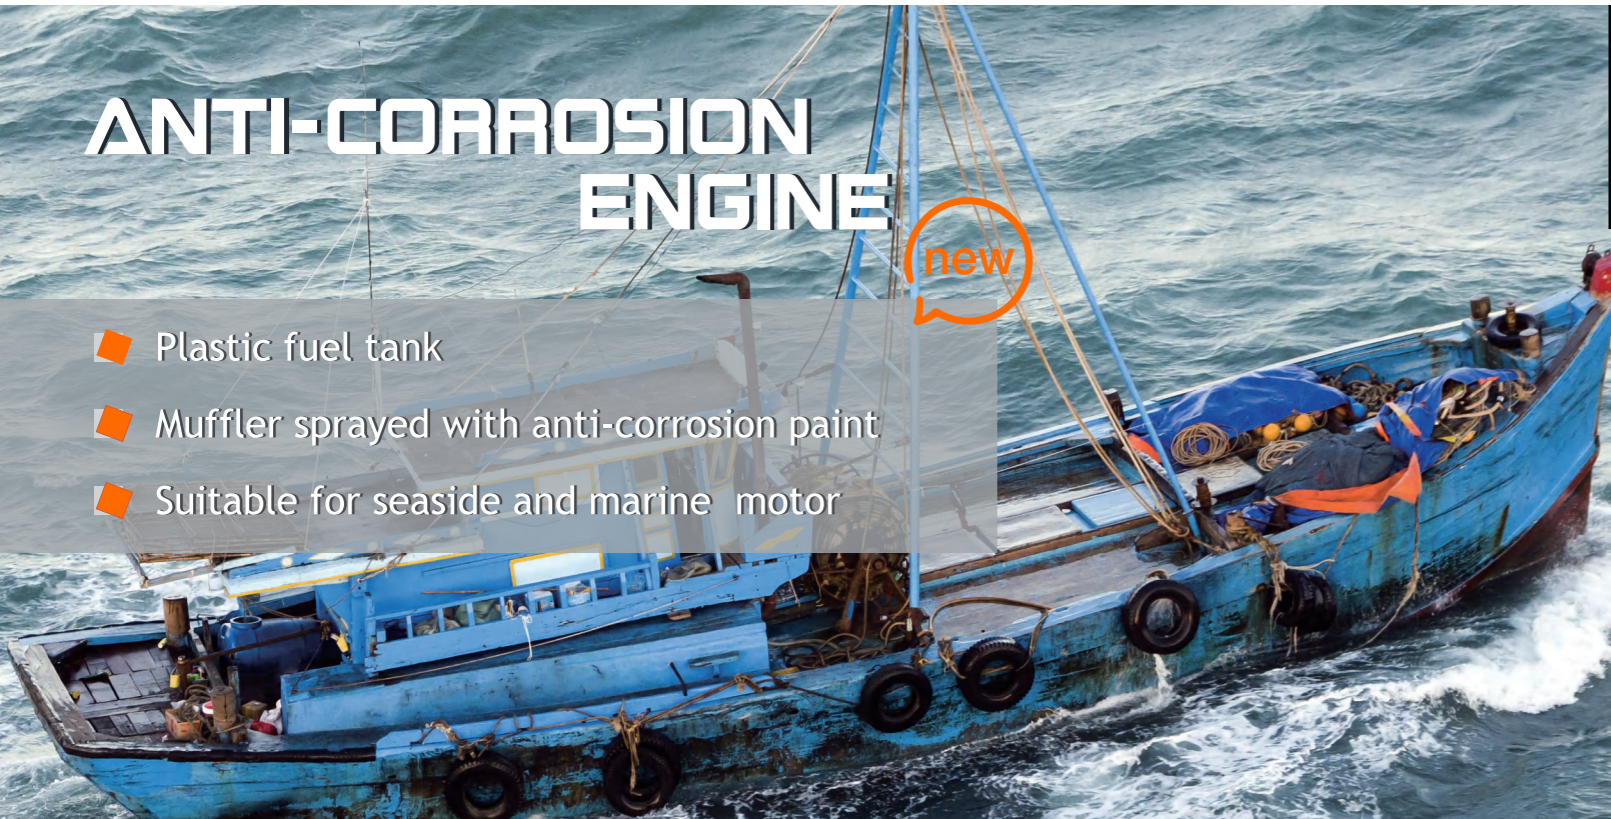


Model:	UP190E
Displacement :	420 cc
Bore x Stroke (mm):	90 x 66
Max.Output (HP) /rpm:	14 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	32.2 / 33
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil /Electric




Recoil Electric

Model:	UP192E
Displacement:	459 cc
Bore x Stroke (mm):	92 x 69
Max.Output (HP) /rpm:	15 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	34.2 / 35
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil / Electric



Recoil Electric

Model:	UP152 / UP156
Displacement:	79.8 cc / 98 cc
Bore x Stroke (mm):	52 x 37.6 / 56 x 40
Max.Output (HP) /rpm:	2.1 / 3600 2.7 / 3600
Fuel Consumption (g/kWh):	≤450
Fuel Oil Tank Capacity (L):	1.6
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	0.4
Net Weight / Gross Weight (kg):	9.9 / 11.5
Unit Dim (L x W x H) (mm):	310 x 280 x 300
20ft/40ft Container Qty:	594 / 1200
Starting System:	Recoil




Recoil Electric

Model:	UP170 / UP170B
Displacement:	208 cc / 212 cc
Bore x Stroke (mm):	70 x 54 / 70 x 55
Max.Output (HP) /rpm:	7.0 / 3600 7.2 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	3.6
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	0.6
Net Weight / Gross Weight (kg):	13.5 / 16.0
Unit Dim (L x W x H) (mm):	350 x 300 x 330
20ft/40ft Container Qty:	512 / 1065
Starting System:	Recoil / Electric




TOP PICK
UP170B




Recoil Electric

Model:	UP170C
Displacement:	223 cc
Bore x Stroke (mm):	70 x 58
Max.Output (HP) /rpm:	7.5 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	3.6
Lubrication Oil:	SAE 10W / 30
Lubrication Oil Volume (L):	0.6
Net Weight / Gross Weight (kg):	15.3 / 17.9
Unit Dim (L x W x H) (mm):	350 x 300 x 330
20ft/40ft Container Qty:	512 / 1065
Starting System:	Recoil / Electric




Recoil Electric

Model:	UP188
Displacement:	389 cc
Bore x Stroke (mm):	88 x 64
Max.Output (HP) /rpm:	13 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	32.2 / 33
Unit Dim (L x W x H) (mm):	542 x 500 x 507
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil / Electric




Recoil Electric

Model:	UP190
Displacement:	420 cc
Bore x Stroke (mm):	90 x 66
Max.Output (HP) /rpm:	14 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	6.5
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	32.2 / 33
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil /Electric




Recoil Electric

Model:	UP192
Displacement:	459 cc
Bore x Stroke (mm):	92 x 69
Max.Output (HP) /rpm:	15 / 3600
Fuel Consumption (g/kWh):	≤374
Fuel Oil Tank Capacity (L):	/
Lubrication Oil:	SAE 10W/30
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	34.2/35
Unit Dim (L x W x H) (mm):	525 x 485 x 485
20ft/40ft Container Qty:	176 / 384
Starting System:	Recoil / Electric




Recoil Electric

Model:	UD170
Displacement:	211 cc
Bore x Stroke (mm):	70 x 55
Max.Output (HP) /rpm:	4.7 / 3600
Fuel Consumption (g/kWh):	≤288.3
Fuel Oil Tank Capacity (L):	2.4
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	0.8
Net Weight / Gross Weight (kg):	29 / 34
Unit Dim (L x W x H) (mm):	427 x 380 x 462
20ft/40ft Container Qty:	400 / 830
Starting System:	Recoil / Electric




Recoil Electric

Model:	UD178
Displacement:	296 cc
Bore x Stroke (mm):	78 x 62
Max.Output (HP) /rpm:	6.7 / 3600
Fuel Consumption (g/kWh):	≤285.6
Fuel Oil Tank Capacity (L):	3.3
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	1.1
Net Weight / Gross Weight (kg):	35 / 39
Unit Dim (L x W x H) (mm):	440 x 360 x 460
20ft/40ft Container Qty:	240 / 508
Starting System:	Recoil / Electric



Recoil Electric

Model:	UD186
Displacement:	418 cc
Bore x Stroke (mm):	86 x 72
Max.Output (HP) /rpm:	10 / 3600
Fuel Consumption (g/kWh):	≤ 285.7
Fuel Oil Tank Capacity (L):	5.4
Lubrication Oil:	SAE 15W/40 API CF
Lubrication Oil Volume (L):	1.65
Net Weight / Gross Weight (kg):	50 / 55
Unit Dim (L x W x H) (mm):	460 x 410 x 510
20ft/40ft Container Qty:	192 / 400
Starting System:	Recoil /Electric



Recoil Electric

